






54▶21-PULLAWAY

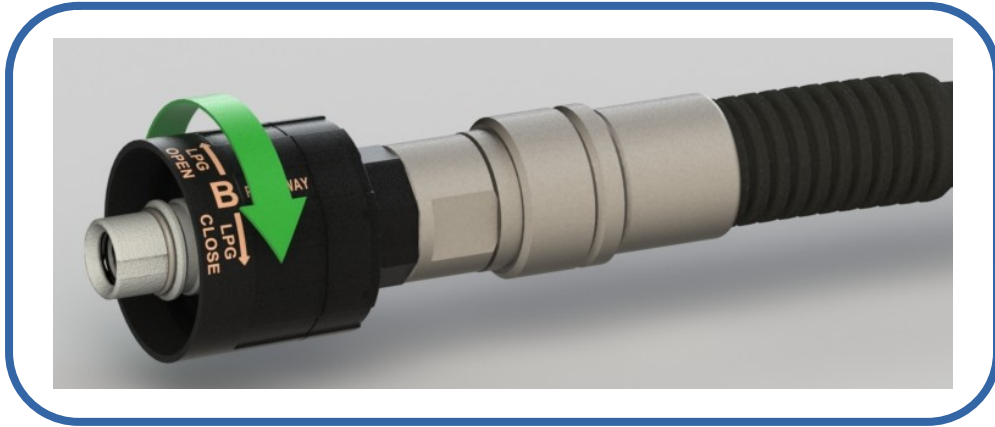

1) Rotate the ring nut in the indicated direction (LPG CLOSE) until it stops .

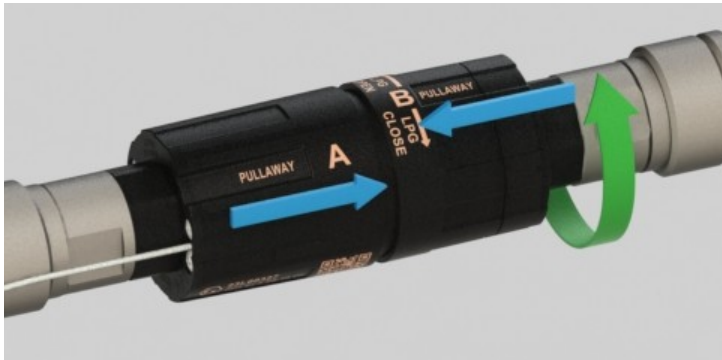

2) Keeping part B pressed against part A, rotate it to hook the joint.

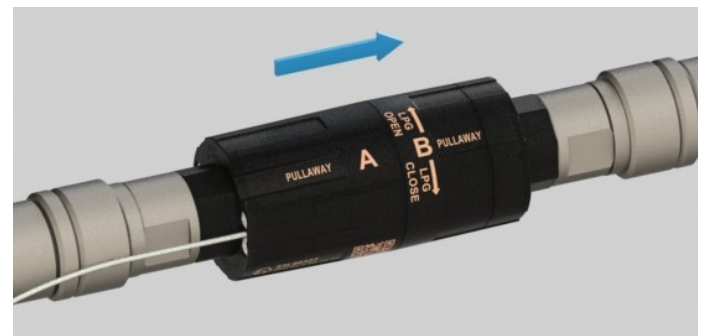

3) Rotate the ring nut in the opposite direction of step 1 (LPG OPEN) until it stops.