
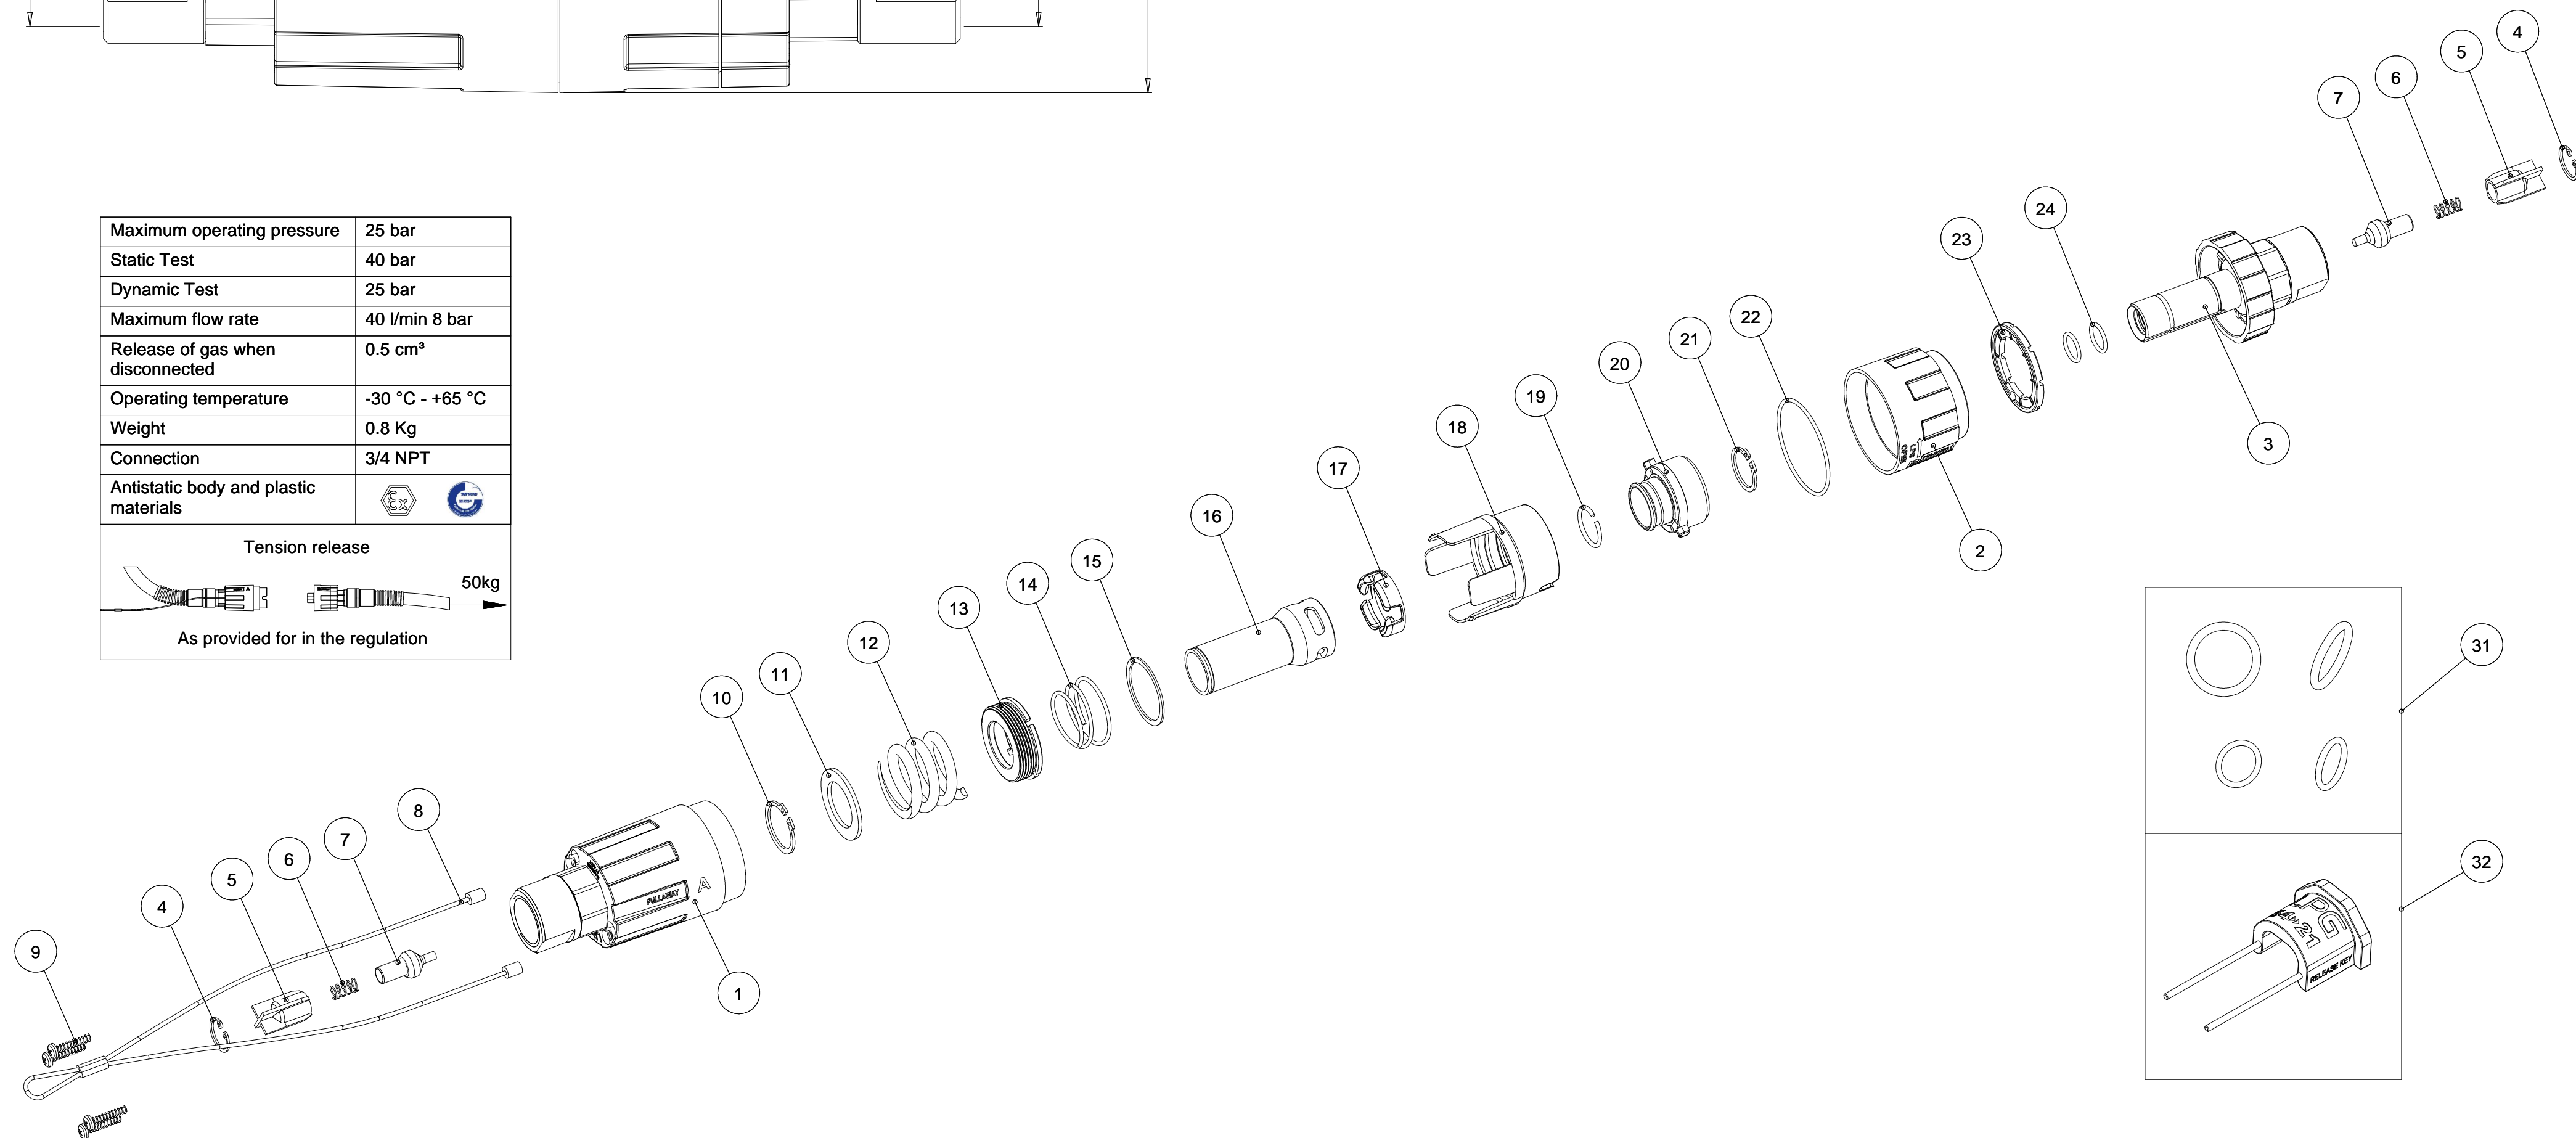


Maximum operating pressure	25 bar
Static Test	40 bar
Dynamic Test	25 bar
Maximum flow rate	40 l/min 8 bar
Release of gas when disconnected	0.5 cm ³
Operating temperature	-30 °C - +65 °C
Weight	0.8 Kg
Connection	3/4 NPT
Antistatic body and plastic materials	

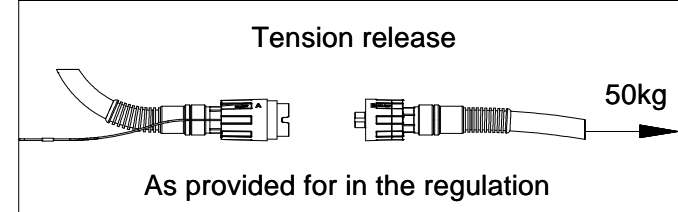

N.	DESCRIPTION	CODE	Qt.
1	FIXED BODY	5421_721	1
2	STOP FERRULE	5421_734	1
3	MOVABLE BODY	5421_731	1
4	SEEGER UNI 7437-17	5421_351	2
5	VALVE SUPPORT	5421_747	2
6	VALVE SPRING	5421_749	2
7	VALVE	5421_746	2

N.	DESCRIPTION	CODE	Qt.
8	FASTENING CABLE	5421_760	1
9	SCREW	5421_321	4
10	SEEGER UNI 7435-24	5421_354	1
11	SPRING WASHER	5421_728	1
12	CALIBRATE SPRING	5421_741	1
13	SPRING FERRULE	5421_730	1
14	RETURN BUSH SPRING	5421_727	1

N.	DESCRIPTION	CODE	Qt.
15	SPRING WASHER	5421_735	1
16	RETENTION BUSH	5421_726	1
17	BLOCKING RING	5421_729	1
18	HOOKING BUSH	5421_725	1
19	RING UNI 7433-A20	5421_352	1
20	BLOCKING BUSH	5421_737	1
21	SEEGER UNI 7435-20	5421_353	1

N.	DESCRIPTION	CODE	Qt.
22	O-RING 2187	5421_340	1
23	ANTI-UNSCREWING RUBBER	5421_751	1
24	O-RING 2050	5421_339	1
31	GASKET KIT PULLAWAY	5421_346	1
32	RELEASE KEY	5421_767	1